

# DuPont™ Delrin® SC690 NC010

## ACETAL RESIN

### Product Information

Common features of Delrin® acetal resins include mechanical and physical properties such as high mechanical strength and rigidity, excellent fatigue and impact resistance, as well as resistance to moisture, gasoline, lubricants, solvents, and many other neutral chemicals. Delrin® acetal resins also have excellent dimensional stability and good electrical insulating characteristics. They are naturally resilient, self-lubricating, and available in a variety of colors and speciality grades.

Delrin® acetal resin typically is used in demanding applications in the automotive, domestic appliances, sports, industrial engineering, electronics, and consumer goods industries.

**Delrin® SC690 is a low viscosity acetal homopolymer, developed for thin-walled parts requiring high precision molding in the healthcare industry.**

### SPECIAL CONTROL for HEALTHCARE APPLICATIONS

This product is manufactured according to Good Manufacturing Practice (GMP) principles and generally accepted in food contact applications in Europe and the USA when meeting applicable use conditions. This product is also tested against ISO 10993-5 and -11 and selected parts of USP Class VI. For details, individual compliance statements are available from your DuPont representative.

General information	Value	Unit	Test Standard
Resin Identification	POM	-	ISO 1043
Part Marking Code	POM	-	ISO 11469
Rheological properties	Value	Unit	Test Standard
Melt volume-flow rate	21	cm <sup>3</sup> /10min	ISO 1133
Temperature	190	°C	ISO 1133
Load	2.16	kg	ISO 1133
Melt mass-flow rate	25	g/10min	ISO 1133
Moulding shrinkage, parallel	1.9	%	ISO 294-4, 2577
Moulding shrinkage, normal	1.9	%	ISO 294-4, 2577
Mechanical properties	Value	Unit	Test Standard
Tensile Modulus	3300	MPa	ISO 527-1/-2
Yield stress	71	MPa	ISO 527-1/-2
Yield strain	12	%	ISO 527-1/-2
Nominal strain at break	23	%	ISO 527-1/-2
Flexural Modulus	3000	MPa	ISO 178
Tensile creep modulus			ISO 899-1
1h	2800	MPa	
1000h	1500	MPa	
Charpy impact strength			ISO 179/1eU
23°C	200	kJ/m <sup>2</sup>	
-30°C	200	kJ/m <sup>2</sup>	
Charpy notched impact strength			ISO 179/1eA
23°C	8	kJ/m <sup>2</sup>	
-30°C	7	kJ/m <sup>2</sup>	
Izod notched impact strength			ISO 180/1A
23°C	7	kJ/m <sup>2</sup>	
-40°C	8	kJ/m <sup>2</sup>	
Hardness, Rockwell, M-scale	92	-	ISO 2039-2
Hardness, Rockwell, R-scale	120	-	ISO 2039-2
Thermal properties	Value	Unit	Test Standard
Melting temperature, 10°C/min	178	°C	ISO 11357-1/-3
Temp. of deflection under load			ISO 75-1/-2
1.8 MPa	94	°C	
0.45 MPa	162	°C	
Vicat softening temperature, 50°C/h, 50N	160	°C	ISO 306
Coeff. of linear therm. expansion, parallel	120	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion			
normal	120	E-6/K	ISO 11359-1/-2
Parallel, 23-55°C(73-130°F)	104	E-6/K	ASTM E 831

Revised: 2018-06-20

Page: 1 of 6

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

#### North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

#### Asia Pacific

Tel: +81 3 5521 8600

#### Europe/Middle East/Africa

Tel: +41 22 717 51 11



# DuPont™ Delrin® SC690 NC010

## ACETAL RESIN

RTI, electrical			UL 746B
0.75mm	50	°C	
1.5mm	110	°C	
3mm	110	°C	
RTI, impact			UL 746B
0.75mm	50	°C	
1.5mm	85	°C	
3mm	90	°C	
RTI, strength			UL 746B
0.75mm	50	°C	
1.5mm	90	°C	
3mm	95	°C	
<b>Flammability</b>	<b>Value</b>	<b>Unit</b>	<b>Test Standard</b>
Oxygen Index	23	%	ASTM D 2863
Hot Wire Ignition, 0.75mm 1: 0.75mm	8 <sup>[1]</sup>	s	UL 746A
<b>Electrical properties</b>	<b>Value</b>	<b>Unit</b>	<b>Test Standard</b>
Relative permittivity			IEC 62631-2-1
100Hz	3.8	-	
1MHz	3.8	-	
Dissipation factor, 1MHz	50	E-4	IEC 62631-2-1
Volume resistivity	1E12	Ohm*m	IEC 62631-3-1
Surface resistivity	>1E15	Ohm	IEC 62631-3-2
Comparative tracking index	600	-	IEC 60112
<b>Other properties</b>	<b>Value</b>	<b>Unit</b>	<b>Test Standard</b>
Humidity absorption, 2mm	0.3	%	Sim. to ISO 62
Water absorption, 2mm	1.4	%	Sim. to ISO 62
Density	1420	kg/m <sup>3</sup>	ISO 1183
<b>VDA Properties</b>	<b>Value</b>	<b>Unit</b>	<b>Test Standard</b>
Emissions	<8	mg/kg	VDA 275
Fogging, F-value (refraction)	95	%	ISO 6452
Fogging, G-value (condensate)	0.2	mg	ISO 6452
<b>Injection</b>	<b>Value</b>	<b>Unit</b>	<b>Test Standard</b>
Drying Recommended	yes	-	-
Drying Temperature	≥80	°C	-
Drying Time, Dehumidified Dryer	2 - 4	h	-
Processing Moisture Content	≤0.2	%	-
Melt Temperature Optimum	215	°C	-
Min. melt temperature	210	°C	-
Max. melt temperature	220	°C	-
Mold Temperature Optimum	90	°C	-
Min. mould temperature	80	°C	-
Max. mould temperature	100	°C	-
Hold pressure range	80 - 100	MPa	-
Hold pressure time	8	s/mm	-
Annealing time, optional	30	min/mm	-
Annealing temperature	160	°C	-
<b>Characteristics</b>			
Processing			• Injection Moulding
Delivery form			• Pellets
Additives			• Lubricants                      • Release agent

Revised: 2018-06-20

Page: 2 of 6

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

### North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

### Asia Pacific

Tel: +81 3 5521 8600

### Europe/Middle East/Africa

Tel: +41 22 717 51 11




Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

# DuPont™ Delrin® SC690 NC010


## ACETAL RESIN

### Diagrams

#### Viscosity-shear rate

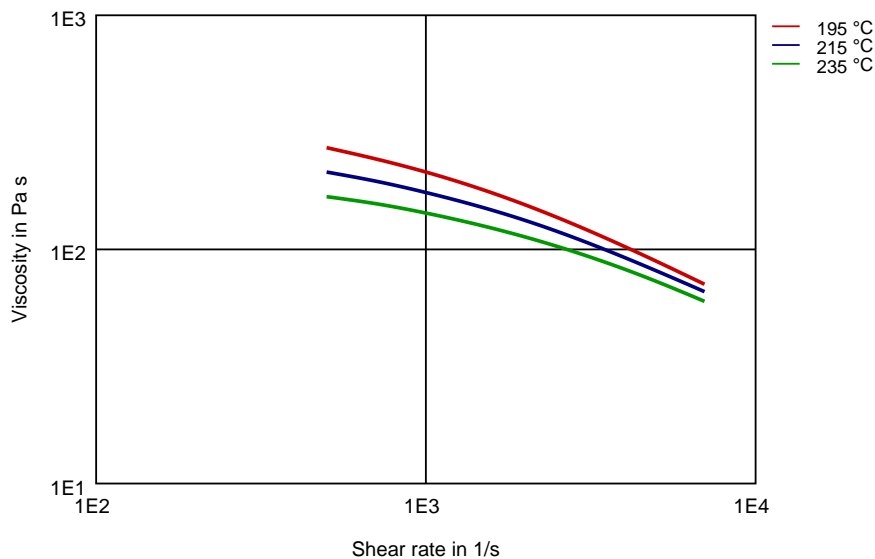


#### Shearstress-shear rate

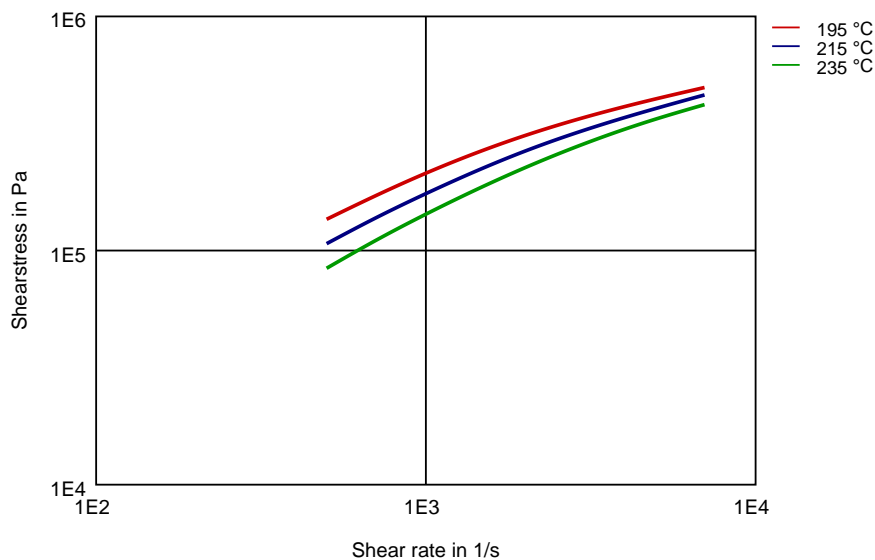

# DuPont™ Delrin® SC690 NC010

## ACETAL RESIN

Dynamic Shear modulus-temperature

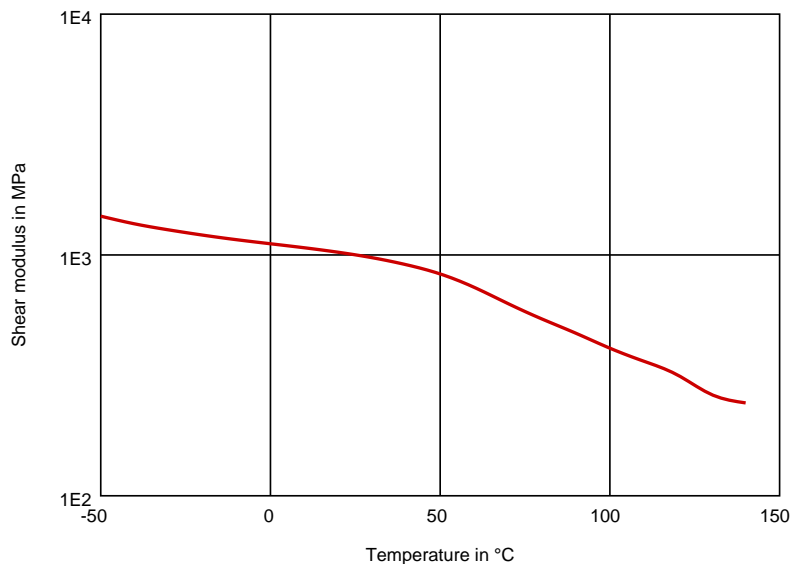

Revised: 2018-06-20

Page: 4 of 6

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

### North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

### Asia Pacific

Tel: +81 3 5521 8600

### Europe/Middle East/Africa

Tel: +41 22 717 51 11


Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.



# DuPont™ Delrin® SC690 NC010

## ACETAL RESIN

Stress-strain

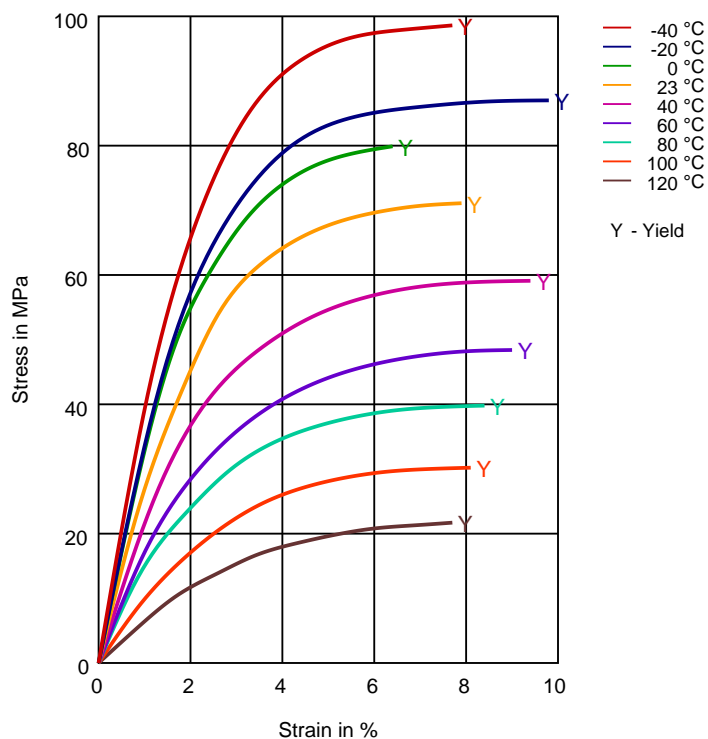

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

### North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

### Asia Pacific

Tel: +81 3 5521 8600

### Europe/Middle East/Africa


Tel: +41 22 717 51 11



# DuPont™ Delrin® SC690 NC010

## ACETAL RESIN

### Secant modulus-strain

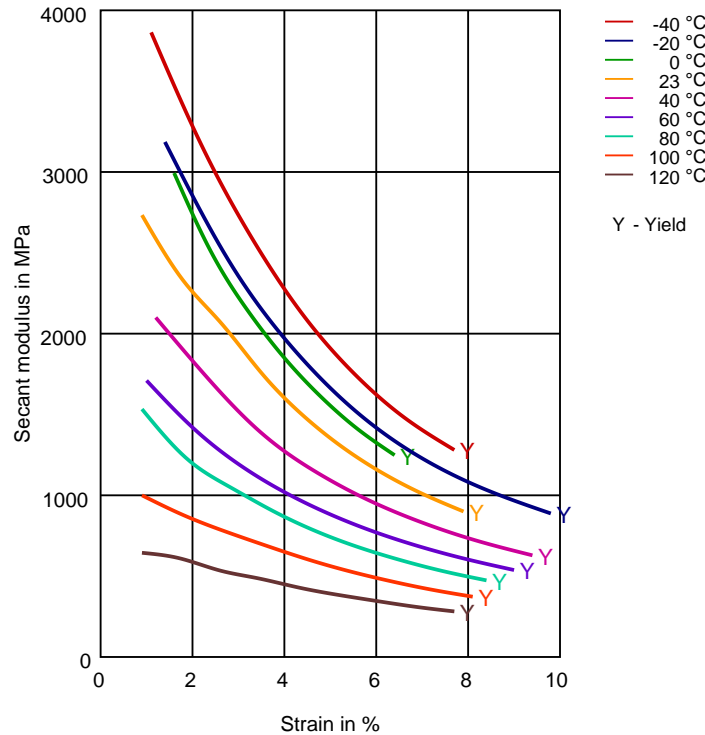

Contact DuPont for Material Safety Data Sheet, general guides and/or additional information about ventilation, handling, purging, drying, etc. ISO Mechanical properties measured at 4mm (Hytrell® measured at 2 mm), IEC Electrical properties measured at 2mm, all ASTM properties measured at 3.2mm, and test temperatures are 23°C unless otherwise stated.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents. Caution: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont customer representative and read Medical Caution H-50103-5.

Copyright © 2017 DuPont or its affiliates. All Rights Reserved. The DuPont Oval Logo, DuPont™, The miracles of science™ and all products denoted with ® or ™ are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates.

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

#### North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

#### Asia Pacific

Tel: +81 3 5521 8600

#### Europe/Middle East/Africa

Tel: +41 22 717 51 11

