

# Amodel® A-1565 HS

## polyphthalamide

Amodel® A-1565 HS is a 65% glass and mineral-reinforced polyphthalamide (PPA) designed to be cost-effective in applications requiring high stiffness, good dimensional stability and good retention of stiffness at elevated temperatures. This grades also exhibits a high deflection temperature and flexural modulus.

- Black: A-1565 HS BK 324

### General

Material Status	• Commercial: Active
Availability	<ul style="list-style-type: none"> <li>• Africa &amp; Middle East</li> <li>• Asia Pacific</li> <li>• Europe</li> <li>• Latin America</li> <li>• North America</li> </ul>
Filler / Reinforcement	• Glass\Mineral, 65% Filler by Weight
Additive	• Heat Stabilizer
Features	<ul style="list-style-type: none"> <li>• Chemical Resistant</li> <li>• Creep Resistant</li> <li>• Good Dimensional Stability</li> <li>• High Heat Resistance</li> <li>• Low CLTE</li> <li>• Low Warpage</li> <li>• Lubricated</li> <li>• Ultra High Stiffness</li> </ul>
Uses	<ul style="list-style-type: none"> <li>• Automotive Applications</li> <li>• Automotive Under the Hood</li> <li>• Housings</li> <li>• Industrial Applications</li> <li>• Industrial Parts</li> <li>• Pump Parts</li> </ul>
RoHS Compliance	• RoHS Compliant
Automotive Specifications	<ul style="list-style-type: none"> <li>• ASTM D4000 PA121 R65 Color: BK324 Black</li> <li>• DELPHI M-53294 Color: BK324 Black</li> <li>• ASTM D6779 PA121R65</li> </ul>
Appearance	• Black
Forms	• Pellets
Processing Method	• Injection Molding

Physical	Dry	Conditioned	Unit	Test method
Density	1.90	--	g/cm <sup>3</sup>	ISO 1183/A
Molding Shrinkage				ASTM D955
Flow	0.30	--	%	
Across Flow	0.50	--	%	
Water Absorption (24 hr)	0.10	--	%	ASTM D570

Mechanical	Dry	Conditioned	Unit	Test method
Tensile Modulus				
--	20700	20800	MPa	ASTM D638
23°C	19700	--	MPa	ISO 527-2
100°C	15400	--	MPa	ISO 527-2
150°C	5720	--	MPa	ISO 527-2
175°C	5100	--	MPa	ISO 527-2

# Amodel® A-1565 HS

## polyphthalamide

Mechanical	Dry	Conditioned	Unit	Test method
<b>Tensile Stress</b>				
Break, 23°C	138	--	MPa	ISO 527-2
Break, 100°C	91.7	--	MPa	ISO 527-2
Break, 150°C	46.2	--	MPa	ISO 527-2
Break, 175°C	32.4	--	MPa	ISO 527-2
--	131	123	MPa	ASTM D638
<b>Tensile Elongation</b>				
Break	1.2	1.2	%	ASTM D638
Break, 23°C	1.0	--	%	ISO 527-2
Break, 100°C	1.3	--	%	ISO 527-2
Break, 150°C	2.4	--	%	ISO 527-2
Break, 175°C	1.8	--	%	ISO 527-2
<b>Flexural Modulus</b>				
--	17900	18000	MPa	ASTM D790
23°C	9100	--	MPa	ISO 178
100°C	6830	--	MPa	ISO 178
150°C	2480	--	MPa	ISO 178
175°C	2280	--	MPa	ISO 178
<b>Flexural Strength</b>				
--	210	196	MPa	ASTM D790
23°C	211	--	MPa	ISO 178
100°C	163	--	MPa	ISO 178
150°C	69.6	--	MPa	ISO 178
175°C	55.8	--	MPa	ISO 178
Compressive Strength (13.0 mm)	189	--	MPa	ASTM D695
Shear Strength	71.0	49.6	MPa	ASTM D732
<b>Impact</b>				
Charpy Notched Impact Strength (23°C)	3.4	--	kJ/m <sup>2</sup>	ISO 179/1eA
Charpy Unnotched Impact Strength (23°C)	44	--	kJ/m <sup>2</sup>	ISO 179/1eU
<b>Notched Izod Impact</b>				
--	37	32	J/m	ASTM D256
23°C	4.0	--	kJ/m <sup>2</sup>	ISO 180/1A
<b>Unnotched Izod Impact</b>				
--	410	--	J/m	ASTM D256
23°C	32	--	kJ/m <sup>2</sup>	ISO 180/1U
<b>Thermal</b>				
Deflection Temperature Under Load				ASTM D648
1.8 MPa, Unannealed	271	--	°C	ISO 75-2/A
Melting Temperature	311	--	°C	ISO 11357-3 ASTM D3418
<b>CLTE</b>				
Flow : 0 to 100°C	2.0E-5	--	cm/cm/°C	ASTM E831
Flow : 100 to 200°C	1.7E-5	--	cm/cm/°C	
Transverse : 0 to 100°C	3.7E-5	--	cm/cm/°C	
Transverse : 100 to 200°C	8.1E-5	--	cm/cm/°C	

# Amodel® A-1565 HS

polyphthalamide

---

Electrical	Dry	Conditioned	Unit	Test method
Volume Resistivity	4.0E+14	--	ohms-cm	ASTM D257
Arc Resistance	125	--	sec	ASTM D495
Comparative Tracking Index (CTI)	600	--	V	UL 746

# Amodel® A-1565 HS

## polyphthalamide

---

Injection	Dry Unit
Drying Temperature	120 °C
Drying Time	4.0 hr
Suggested Max Moisture	0.030 to 0.060 %
Hopper Temperature	79 °C
Rear Temperature	304 to 318 °C
Front Temperature	316 to 329 °C
Processing (Melt) Temp	321 to 343 °C
Mold Temperature	135 °C

---

### Injection Notes

---


#### Storage:

- Amodel® compounds are shipped in moisture-resistant packages at moisture levels according to specifications. Sealed, undamaged bags should be preferably stored in a dry room at a maximum temperature of 50°C (122°F) and should be protected from possible damage. If only a portion of a package is used, the remaining material should be transferred into a sealable container. It is recommended that Amodel® resins be dried prior to molding following the recommendations found in this datasheet and/or in the Amodel® processing guide.
-

# Amodel® A-1565 HS

polyphthalamide

## Viscosity vs. Shear Rate (ISO 11403-2)

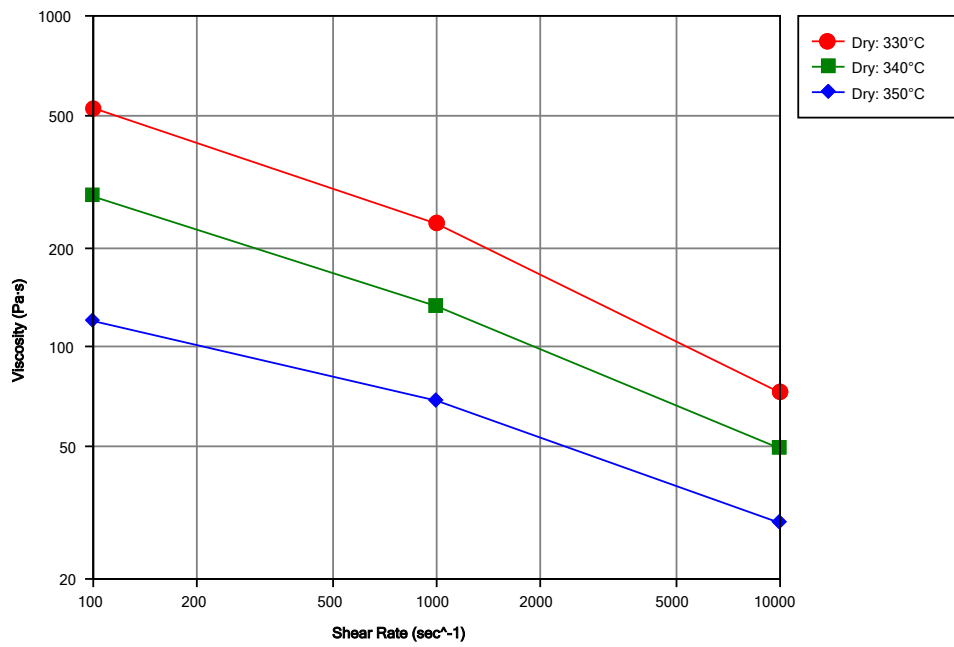

# Amodel® A-1565 HS

polyphthalamide

---

## Notes

Typical properties: these are not to be construed as specifications.

---

**[www.solvay.com](http://www.solvay.com)**

[SpecialtyPolymers.EMEA@solvay.com](mailto:SpecialtyPolymers.EMEA@solvay.com) | Europe, Middle East and Africa

[SpecialtyPolymers.Americas@solvay.com](mailto:SpecialtyPolymers.Americas@solvay.com) | Americas

[SpecialtyPolymers.Asia@solvay.com](mailto:SpecialtyPolymers.Asia@solvay.com) | Asia and Australia

Safety Data Sheets (SDS) are available by emailing us or contacting your sales representative. Always consult the appropriate SDS before using any of our products.

Neither Solvay Specialty Polymers nor any of its affiliates makes any warranty, express or implied, including merchantability or fitness for use, or accepts any liability in connection with this product, related information or its use. Some applications of which Solvay's products may be proposed to be used are regulated or restricted by applicable laws and regulations or by national or international standards and in some cases by Solvay's recommendation, including applications of food/feed, water treatment, medical, pharmaceuticals, and personal care. Only products designated as part of the Solviva® family of biomaterials may be considered as candidates for use in implantable medical devices. The user alone must finally determine suitability of any information or products for any contemplated use in compliance with applicable law, the manner of use and whether any patents are infringed. The information and the products are for use by technically skilled persons at their own discretion and risk and does not relate to the use of this product in combination with any other substance or any other process. This is not a license under any patent or other proprietary right.

All trademarks and registered trademarks are property of the companies that comprise the Solvay Group or their respective owners.

© 2019 Solvay Specialty Polymers. All rights reserved.

