

Technical Data Sheet

Type: ESTANE® 58219 is a 92A aromatic Polyether-Based Thermoplastic Polyurethane (TPU).

Features: Excellent physical properties, hydrolysis resistance, low temperature performance and clarity. Wide processing window for extrusion.

Uses: Blown and flat die/cast film extrusion, Injection and blow molding.

Physical Properties	Value (Metric)	Unit	Test Method
Hardness (5 sec)	92 +/- 3	Shore A	ASTM D-2240
Specific Gravity	1.14		ASTM D-792
Tensile Strength	9000 (62.1)	psi (MPa)	ASTM D-412
Ultimate Elongation	470	%	"
Tensile Stress at:			
- 100% Elongation	1300 (9.0)	psi (MPa)	ASTM D-412
- 300% Elongation	3300 (22.9)	psi (MPa)	"
Tear Strength:			
- Graves	600 (10.7)	lb/in (kg/mm)	ASTM D-624 (die C)
- Trouser	170 (3.0)	lb/in (kg/mm)	ASTM D-470
Taber Loss (1000 rev)	0.00141 (40)	oz (mg)	ASTM D-3389 (H18, 1000g)
T _m (by DSC)	284 (140)	°F (°C)	Lubrizol Advanced Materials
T _g (by DSC)	-49 (-45)	°F (°C)	Lubrizol Advanced Materials

- Prior to testing samples were conditioned at 23°C for 48 hours.
- Based on extruded sheet (30 mils).
- Listed values are "typical (average) values" and should/cannot be applied for specification purposes.

Supply Form and Standard Packaging

- ESTANE® 58219 TPU is supplied in pellet form and packaged in 50 lb bags or 1000 lb boxes.

Material Preparation

- Prior to processing, ESTANE® 58219 TPU must be dried at 220°F (104°C) for 2-4 hours.
- It is recommended to dry the material in a desiccant type dryer. Target dew point should be -40°C.
- Depending on the applied processing technique, the maximum moisture level should be 0.02%.

The Lubrizol Corporation ("Lubrizol") hopes that you have found the information provided helpful, but you are cautioned that this material, including any prototype formulas, is for informational purposes only and you are solely responsible for making your own assessment of appropriate use of the information. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAWS, LUBRIZOL MAKES NO REPRESENTATIONS, GUARANTEES, OR WARRANTIES (WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE), INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR REGARDING THE COMPLETENESS, ACCURACY, OR TIMELINESS OF ANY INFORMATION. Lubrizol does not guarantee how the materials referenced herein will perform in combination with other substances, in any methods, conditions, or processes, with any equipment, or in non-laboratory environments. BEFORE COMMERCIALIZATION OF ANY PRODUCT CONTAINING THESE MATERIALS, YOU SHOULD THOROUGHLY TEST SUCH PRODUCT, INCLUDING HOW THE PRODUCT IS PACKAGED, TO DETERMINE ITS PERFORMANCE, EFFICACY, AND SAFETY. You are solely responsible for the performance, efficacy, and safety of any products you manufacture. Lubrizol shall not be liable, and you shall assume all risk and responsibility for, any use or handling of any material. Any claims may not be approved in all jurisdictions. Any entity making claims related to these products is responsible for complying with local laws and regulations. Nothing contained herein is to be considered as permission, recommendation, or inducement to practice any patented invention without permission of the patent owner, and it is your sole responsibility to determine if any issues related to patent infringement of any component or combination of components relating to the information provided exists. You acknowledge and agree that you are using the information provided herein at your own risk. If you are dissatisfied with the information provided by Lubrizol, your exclusive remedy shall be to not use the information.



Processing Conditions

- ESTANE® 58219 TPU can be processed on any conventional extruder.

Recommended Starting Extrusion Temperature Profile:

	°F/°C
Zone 1	350/177
Zone 2	360/182
Zone 3	370/188
Zone 4	380/193
Adapter	390/199
Die Zone 1	390/199
Die Zone 2	390/199


Melt Temp. Mid-Range: 385°F/196°C
Screen Pack Recommendation: 20/40/80/20

Application Information: High Performance Film & Sheet

Properties	Value (Metric)	Unit	Test Method
Tensile Set (200%)	16	%	ASTM D-412
Kofler Melt Point	338 (170)	°F (°C)	Lubrizol Advanced Materials
Haze (pressed between)	2.3	%	ASTM D-1003
Volume swell in Water	0.5	%	ASTM D-471

• Only for repeat use articles.

Sheet immersion in water at 75°C

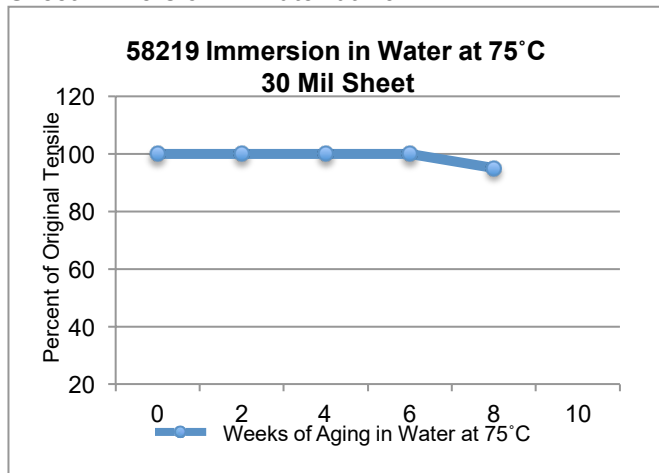

The Lubrizol Corporation ("Lubrizol") hopes that you have found the information provided helpful, but you are cautioned that this material, including any prototype formulas, is for informational purposes only and you are solely responsible for making your own assessment of appropriate use of the information. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAWS, LUBRIZOL MAKES NO REPRESENTATIONS, GUARANTEES, OR WARRANTIES (WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE), INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR REGARDING THE COMPLETENESS, ACCURACY, OR TIMELINESS OF ANY INFORMATION. Lubrizol does not guarantee how the materials referenced herein will perform in combination with other substances, in any methods, conditions, or processes, with any equipment, or in non-laboratory environments. BEFORE COMMERCIALIZATION OF ANY PRODUCT CONTAINING THESE MATERIALS, YOU SHOULD THOROUGHLY TEST SUCH PRODUCT, INCLUDING HOW THE PRODUCT IS PACKAGED, TO DETERMINE ITS PERFORMANCE, EFFICACY, AND SAFETY. You are solely responsible for the performance, efficacy, and safety of any products you manufacture. Lubrizol shall not be liable, and you shall assume all risk and responsibility for, any use or handling of any material. Any claims may not be approved in all jurisdictions. Any entity making claims related to these products is responsible for complying with local laws and regulations. Nothing contained herein is to be considered as permission, recommendation, or inducement to practice any patented invention without permission of the patent owner, and it is your sole responsibility to determine if any issues related to patent infringement of any component or combination of components relating to the information provided exists. You acknowledge and agree that you are using the information provided herein at your own risk. If you are dissatisfied with the information provided by Lubrizol, your exclusive remedy shall be to not use the information.

