

DuPont™ Rynite® RE5329 BK503

THERMOPLASTIC POLYESTER RESIN

Product Information

Rynite® RE5329 BK503 is a 36% glass reinforced polyethylene terephthalate resin developed for ignition systems

General information	Value	Unit	Test Standard
Resin Identification	PET-(GS+GF)36	-	ISO 1043
Part Marking Code	PET-(GS+GF)36	-	ISO 11469
Rheological properties	Value	Unit	Test Standard
Moulding shrinkage, parallel	0.4	%	ISO 294-4, 2577
Moulding shrinkage, normal	0.8	%	ISO 294-4, 2577
Mechanical properties	Value	Unit	Test Standard
Tensile Modulus	11000	MPa	ISO 527-1/-2
Stress at break	110	MPa	ISO 527-1/-2
Strain at break	2.2	%	ISO 527-1/-2
Poisson's ratio	0.34	-	ISO 527-1/-2
Charpy impact strength, 23°C	21	kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	3.4	kJ/m ²	ISO 179/1eA
Thermal properties	Value	Unit	Test Standard
RTI, electrical, 0.75mm	75	°C	UL 746B
RTI, impact, 0.75mm	75	°C	UL 746B
RTI, strength, 0.75mm	75	°C	UL 746B
Flammability	Value	Unit	Test Standard
Burning Behav. at thickness h	HB	class	IEC 60695-11-10
Thickness tested	0.75	mm	IEC 60695-11-10
UL recognition	yes	-	UL 94
Glow Wire Flammability Index, 3mm	960	°C	IEC 60695-2-12
Glow Wire Ignition Temperature, 3mm	750	°C	IEC 60695-2-13
FMVSS Class	B	-	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	<100	mm/min	ISO 3795 (FMVSS 302)
Electrical properties	Value	Unit	Test Standard
Relative permittivity			IEC 62631-2-1
100Hz	4.3	-	
1MHz	3.8	-	
Dissipation factor			IEC 62631-2-1
100Hz	11	E-4	
1MHz	134	E-4	
Volume resistivity	>1E13	Ohm*m	IEC 62631-3-1
Surface resistivity	1E14	Ohm	IEC 62631-3-2
Electric strength	36	kV/mm	IEC 60243-1
Comparative tracking index	200	-	IEC 60112
Other properties	Value	Unit	Test Standard
Density	1630	kg/m ³	ISO 1183
VDA Properties	Value	Unit	Test Standard
Fogging, G-value (condensate)	0.2	mg	ISO 6452
Injection	Value	Unit	Test Standard
Drying Recommended	yes	-	-
Drying Temperature	≥120	°C	-
Drying Time, Dehumidified Dryer	4 - 6	h	-
Processing Moisture Content	≤0.02 ^[1]	%	-
Melt Temperature Optimum	285	°C	-
Min. melt temperature	270	°C	-
Max. melt temperature	290	°C	-
Max. screw tangential speed	0.2	m/s	-
Mold Temperature Optimum	140	°C	-
Min. mould temperature	120	°C	-

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11



DuPont™ Rynite® RE5329 BK503

THERMOPLASTIC POLYESTER RESIN

Max. mould temperature	140 ^[2] °C	-
Hold pressure range	≥80 MPa	-
Hold pressure time	4 s/mm	-
Back pressure	As low as possible	-
Ejection temperature	170 °C	-

1: At levels above 0.02%, strength and toughness will decrease, even though parts may not exhibit surface defects. 2: (6mm - 1mm thickness)

Characteristics

Processing	• Injection Moulding		
Delivery form	• Pellets		
Additives	• Release agent		
Regional Availability	• North America	• Asia Pacific	• Near East/Africa
	• Europe	• South and Central America	• Global

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11




DuPont™ Rynite® RE5329 BK503

THERMOPLASTIC POLYESTER RESIN

Diagrams

Dynamic Tensile modulus-temperature

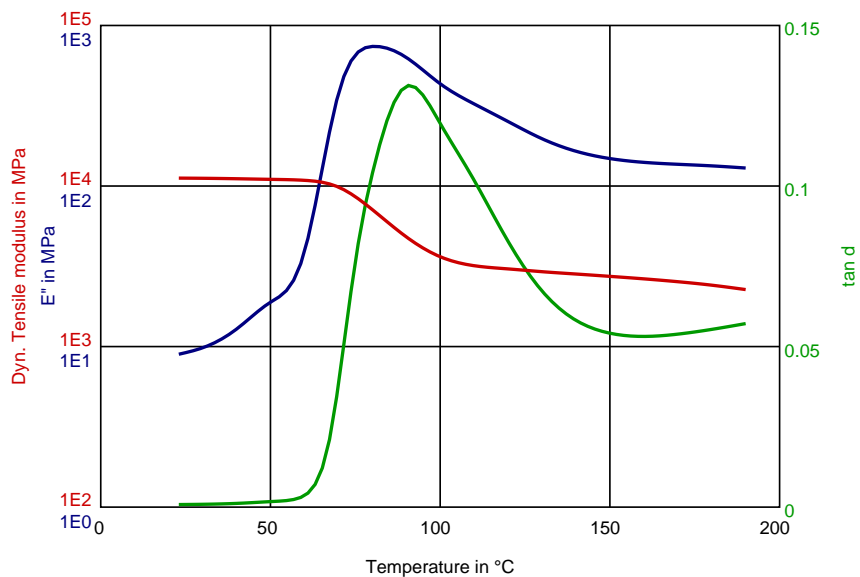

Revised: 2018-03-12

Page: 3 of 6

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11




Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

DuPont™ Rynite® RE5329 BK503

THERMOPLASTIC POLYESTER RESIN

Stress-strain

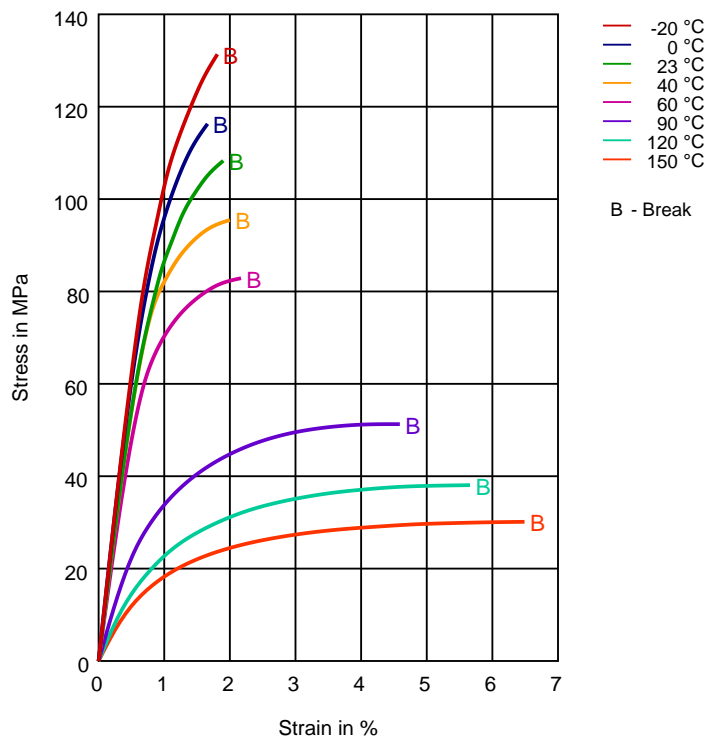

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11



DuPont™ Rynite® RE5329 BK503

THERMOPLASTIC POLYESTER RESIN

Secant modulus-strain

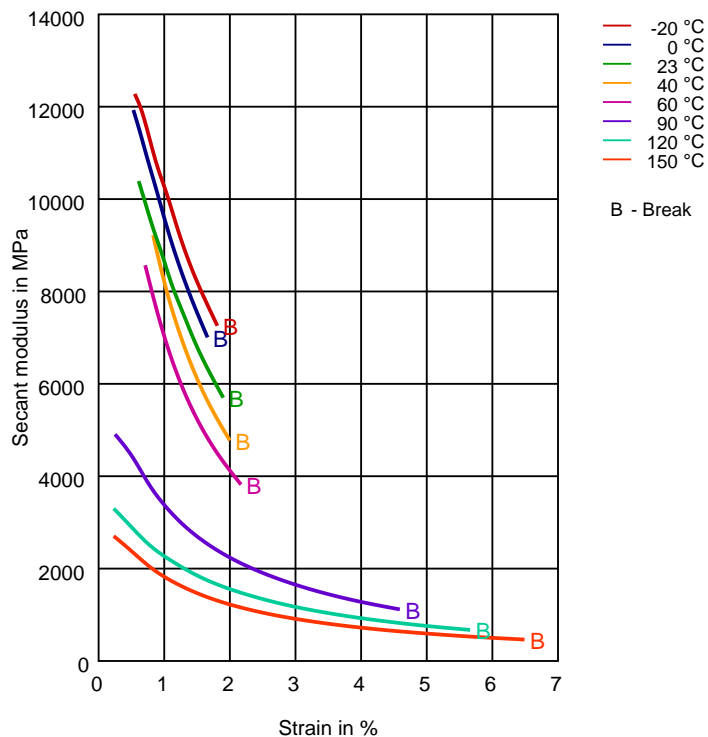

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa


Tel: +41 22 717 51 11



DuPont™ Rynite® RE5329 BK503

THERMOPLASTIC POLYESTER RESIN

Tensile modulus-temperature

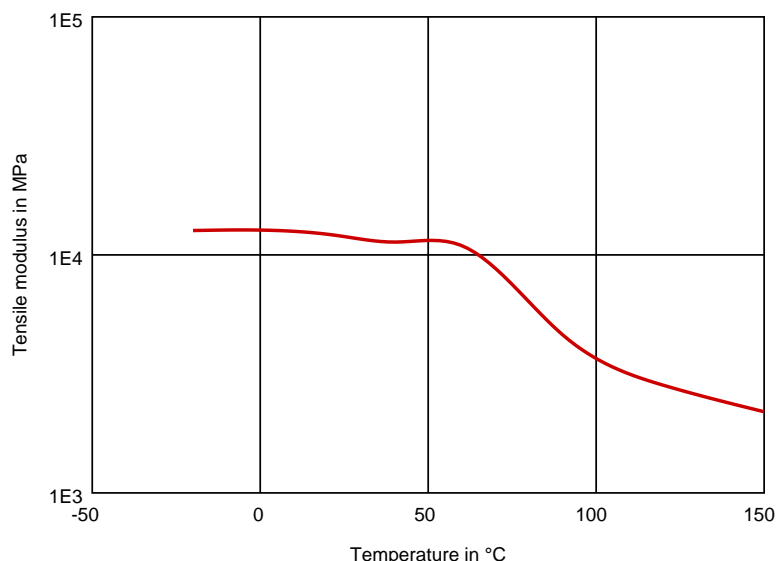

Contact DuPont for Material Safety Data Sheet, general guides and/or additional information about ventilation, handling, purging, drying, etc. ISO Mechanical properties measured at 4mm (Hytrel® measured at 2 mm), IEC Electrical properties measured at 2mm, all ASTM properties measured at 3.2mm, and test temperatures are 23°C unless otherwise stated.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents. Caution: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont customer representative and read Medical Caution H-50103-5.

Copyright © 2017 DuPont or its affiliates. All Rights Reserved. The DuPont Oval Logo, DuPont™, The miracles of science™ and all products denoted with ® or ™ are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates.

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Tel: +1 302 999-4592

Toll-Free (USA): 800 441-0575

Asia Pacific

Tel: +81 3 5521 8600

Europe/Middle East/Africa

Tel: +41 22 717 51 11

