

ECF-9202

Polycarbonate compound resin

General information

Description

C/F 10%

Electrical conductivity

Applications

Multi purpose grade

Typical properties¹

	Test method	Typical value	Unit	
Physical				
Melt Flow Index, 300°C, 1.2 kg	ASTM D1238	-	g/10 min	
Specific Gravity	ASTM D792	1.28		
Mold Shrinkage	ASTM D955	0.1~0.3	%	
Mechanical				
Tensile Strength, yield, 50 mm/min	ASTM D638	1,700	kg _f /cm ²	
Tensile Elongation, break, 50 mm/min	ASTM D638	-	%	
Flexural Strength, yield, 10 mm/min	ASTM D790	2,100	kg _f /cm ²	
Flexural Modulus, 10 mm/min	ASTM D790	100,500	kg _f /cm ²	
IZOD Impact Strength, notched, 23°C, 1/8"	ASTM D256	14	kg _f -cm/cm	
	notched, 23°C, 1/4"	ASTM D256	-	kg _f -cm/cm
	notched, -30°C, 1/8"	ASTM D256	-	kg _f -cm/cm
Thermal				
Heat Distortion Temp.	4.6 kg _f /cm ²	ASTM D648	-	°C
	18.6 kg _f /cm ²	ASTM D648	143	°C
Vicat Softening Temp.	Rate B/50	ASTM D1525	-	°C
Electrical				
Surface Resistivity	ASTM D257	10 ¹ ~10 ³	ohms/sq.	
Flammability				
UL94 V-0	UL94	-	mm	

Notes

ISO 9001, 14001, TS 16949


¹ Typical properties : these are not to be construed as specifications.

ECF-9102

Polycarbonate compound resin

Processing guides¹

	Typical value	Unit	
Drying condition			
Drying temperature	120	°C	
Drying time	4	hr	
Maximum moisture content	0.02	%	
Injection molding			
Melt temperature	300 ~ 320	°C	
Nozzle temperature	290 ~ 310	°C	
Barrel	Rear zone	300 ~ 320	°C
	Middle zone	290 ~ 310	°C
	Front zone	280 ~ 300	°C
Hopper temperature	60 ~ 80	°C	
Mold temperature	80 ~ 110	°C	

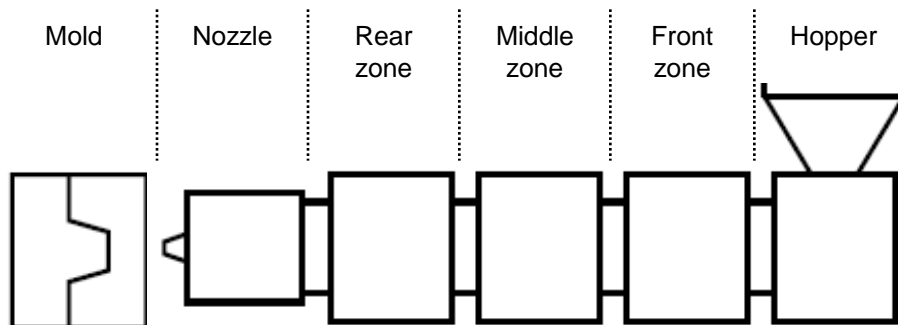

Recycling

Sprues and runners can be reground with virgin resin within the ratio of 20%. Care must be taken to ensure that the regrind is free from impurities and regrind should not be used in applications where impact performance and/or agency compliance are required.

Notes

ISO 9001, 14001, TS 16949

¹ Processing guides : Typical processing parameters are noted. Actual processing conditions will depend on machine size, mold design, material residence time, shot size, etc.